




Synergix Print System 510dp

MTT (3Drawer)
MTR (2Drawer)
MDH (1Drawer)


7/2003

THE DOCUMENT COMPANY
XEROX

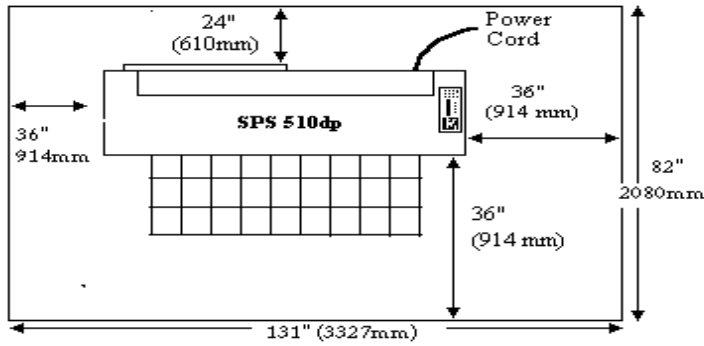

Synergix 510dpPrinter

Floor Space Required 131"x82"
Height Clearance 78" from floor to nearest overhead obstruction within the floor space requirement

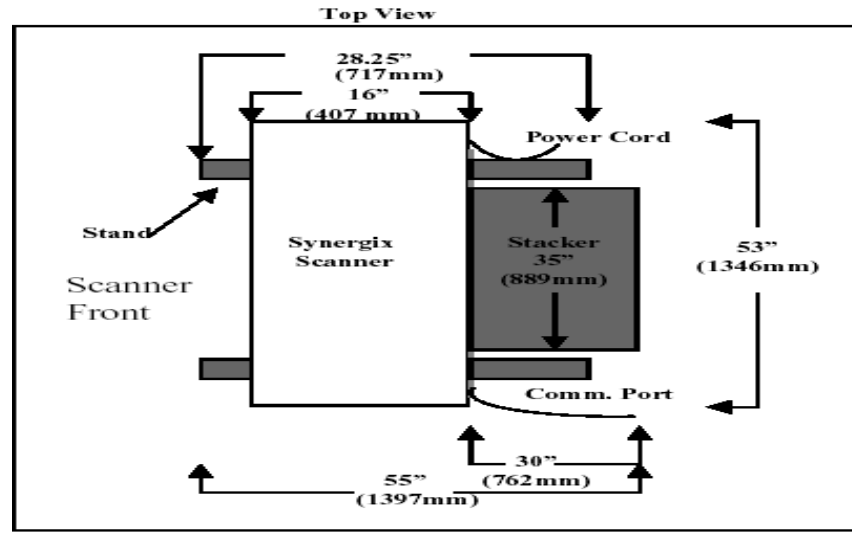

Synergix Scanner


Floor Space Required 103"D x 101"W includes 24" on all sides for service access

ITEM	REORDER #	UNITS / Ctn	Expected Life
Toner	6R989	1	20 K Sq. Ft *
Developer	5R633	1	Life of product
Photoreceptor	1R535	1	120K Sq. Ft.
Web Oiler	22K79000	1	400K Sq. Ft.


* Dependant on area coverage and environment **Toner is independent and should only be used on the 8850 and SPS 510dp products.**

NOTE: Continuous operation at 10D prints / minute is not achievable with 115V power service. Continuous operation at 5D and 7D can be supported with 115VAC. This should be taken into consideration when upgrading from 5D or 7D to 10D configuration


Synergix Print System 510dp Receptacle
220 - 240 Volt / 20 Amp
dedicated circuit

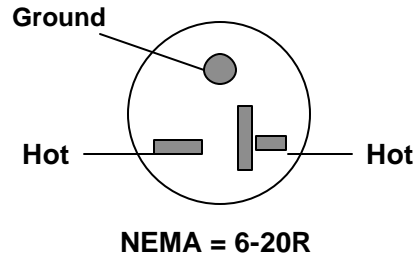


Synergix Print System 510dp Receptacle
115 Volt / 20 Amp
dedicated circuit

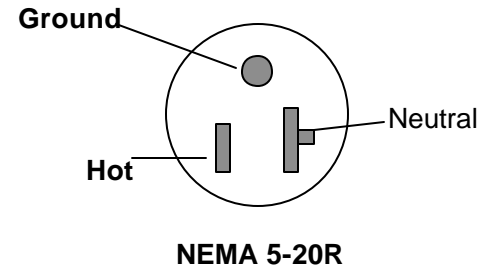

Synergix Scanner 115 Volt 15 Amp
Dedicated circuit

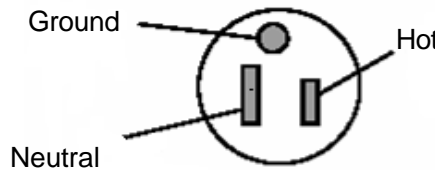

Synergix Controller 115 Volt 15 Amp
Dedicated circuit

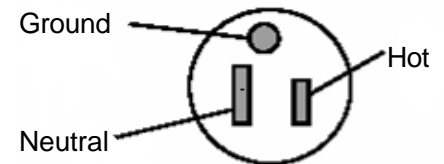



ACCXES Client Tools

Basic Requirements

An AccXES Controller with v 4.0 or higher controller firmware, an AccXES supported printer and an AccXES supported scanner (for scan to net features). A Synergix Scan System and Color Scan-to-Net Feature Key are required for Scanning-to-Net in color. A 9GB or larger controller's hard drive is highly recommended for color scanning because scanning large color documents results in large files that quickly consume hard drive space. This can create a scanner error message requiring you to retrieve the Scan Directory's scanned images to free up enough memory to scan more colored images.

- 9.0 AccXES Client Tools software.
- A workstation running Windows 95/98/2000, or NT 4.0 (minimum service pack 3 and 16 bit color), with an Intel Pentium 90 Mhz or greater (233 Mhz is recommended), or a Sun Sparc workstation running Solaris v2.6, 2.7, or 2.8.

NOTE: *The AccXES Client Tools software does not function over a Novell network.*

- Other System Requirements:
 - 64 MB of memory
 - 30 MB available disk space
 - CD-ROM drive (not required for installing from the XES web site)
 - Mouse or other pointing device
 - Screen resolution: 800x600 or higher
- Appropriate protocols and ports enabled on both the printer and workstation, with a connection established through the network or directly between the printer and your workstation.

Autocad ADI 12/13/14 LT97 Version 4.0.03

Autocad 2000/2000i/2002

Windows 95/98 RTL Driver Version 7.6.0.2

Windows NT/2000/XP RTL Driver Version 9.0.3

Postscript Windows 2000/XP Driver Version 9.0.0.2*

Postscript Windows NT Driver Version 9.0.0.3*

Postscript Windows 95/98 Driver Version 7.0.0.3*

XES is no longer support Windows Driver for 95/98.

* You must have the Adobe Postscript option installed.